



## **P2P IP CAMERA**

### **Plug and View, Instant Surveillance**

CSJ233 is the ideal surveillance system specially designed for home, shop, and small office environment. This instant surveillance system based on the latest P2P (Peerto Peer) technology. User just simply connect the network cable and power plug, then enter the present ID and password in the installed software which come with IP cam, the live video will come out without any IP setting.

### **Features**

- P2P video connection technology for plug and view
- Supports iPhone / Smart Phone remote video monitoring
- Infrared for Day and Night monitoring
- Free Software




CSJ233



## Package Software Feature

- Auto search for connected IP cam
- 1/4/16 channel display and recording
- Schedule / Trigger / full time recording
- P2P connection without IP setting
- Channel title configuration
- Motion detection
- e-Mail alarm notice

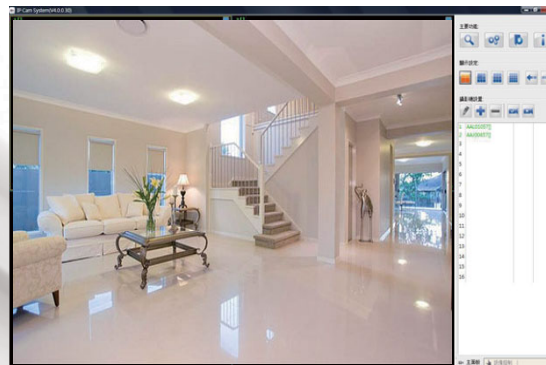


## Camera Feature



- P2P video connection technology for plug and view
- Supports iPhone / Smart Phone remote video monitoring
- Infrared for Day and Night monitoring
- Free Software

## Understanding P2P (Peer to Peer) technology

1. IP camera will connected to P2P server automatically when go through Internet. Then P2P server will build up connection with IP camera.
2. After entering the default ID/Password, PC will connect to P2P server automatically. Then P2P server will build up connection with PC.
3. P2P server will send the message to assigned IP camera based on its corresponding ID/Password, then IP camera can be connected to PC directly.

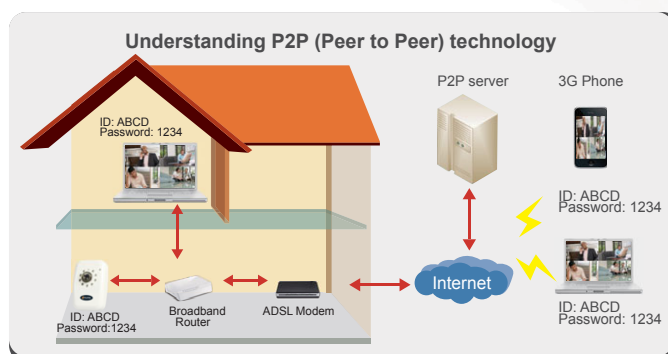

## PC System Requirement For Remote Monitoring & Specifications

| PC System Requirement For Remote Monitoring |                              |
|---------------------------------------------|------------------------------|
| CPU                                         | Pentium® Dual-Core or above  |
| RAM                                         | 1G or above                  |
| Display                                     | 1024*768 / 96DPI             |
| OS                                          | Windows XP/Vista/7           |
| Free HD Space                               | 100GB or above               |
| Network                                     | Ethernet 100 base T or above |

The broadband router is required for internet connection, but it is not included in this package. Basic requirements: Broad band router with DHCP and uPnP functions enabled. Only selected cell phone models support cell phone viewing function. Please check the supported cell phone list from the following website: <http://www.p2pipcam.com/3g/3glist.html>

| Specifications             |                                |
|----------------------------|--------------------------------|
| Model Name                 | CSJ233                         |
| Image sensor               | 1/4-inch VGA sensor            |
| Resolution                 | 640*480, 320*240               |
| Display FPS                | 30fps Max.                     |
| Video compression          | MJPEG                          |
| IR distance (night vision) | 5M Max.                        |
| Dimension (mm)             | 100mm(L) x 60mm (W) x 30mm (H) |
| Weight                     | 300g                           |
| Power source               | AC 100~240V, 50/60Hz           |
| Power consumption          | 4W Maximum                     |



© 2011 by TUTK Co., Ltd. All rights reserved.  
TUTK marks are owned by TUTK Co., Ltd.  
All other trademarks are the property of their respective owners. Pictures of Apple products are for illustration purposes only.

Throughtek Co., Ltd.

[www.tutk.com](http://www.tutk.com)

4F, NO. 221, Chongyang Rd., Nangang District,

Taipei City, 11573, Taiwan

TEL : +886 2 2653 5111

FAX : +886 2 2653 5112

E-MAIL : [info@tutk.com](mailto:info@tutk.com)



Copyright © 2011 Throughtek Co., Ltd