

UTG POS Series

PT6000 Series



Features

- Robust aluminum chassis and fanless design
- IP64 dust & spill resistant for front bezel
- Rimless flat panel design
- Equipped with low power Intel Atom D525 processor for energy saving
- Support VESA mount
- Easy installation and maintenance for HDD
- Friendly adjustable view angle of customer display
- Small footprint and compact design
- Optional UPS

PT6000 Specification

Model no.		PT6000		
Display	LCD Display Size	15" TFT LCD		
	Max. Resolution	1024*768		
	Brightness	250 cd/m ²		
	Touch Screen	5-wire resistive		
Processor	CPU/ Chipset	Intel® Atom™ processor D525 (1M Cache, 1.80GHz) / ICH8-M		
Memory	One SO-DIMM socket supports DDR3 800/1066 up to 4GB			
Graphic Memory	Dynamic Video Memory Technology (DVMT) 3.0 supports up to 224MB of video memory			
Storage	CF Socket	X 1		
	SATAII	X 1		
I/O connectors	USB 2.0	X 4		
	PS/2	X 1 (for Keyboard)		
	Powered COM	X 3 (D-type 9 pins powered COM with DC 5V/ 12V selection)		
	COM	x1(RJ45 CONN)		
	Cash Drawer Port	1 (12V RJ11 cash drawer port)		
	Audio Port	Line-out	X 1	
		Mic-in	X 1	
	VGA Connector	X 1		
	Parallel	X 1		
	Network	LAN	X 1 (RJ45 10/100/1000 Base-T)	
Option	VFD/ Second display/ MSR/ i-button/ Fingerprint sensor			
Environment	Temperature	Operation	32° to 104° F (0° to 40° C)	
		Storage	-4° to 140° F (-20° to 60° C)	
	Relative Humidity	20% to 80% non-condensing		
Power Supply	90W, 19V			
OS Support	Linux / Windows CE / Windows XP Embedded / Windows Embedded Standard/ Windows Embedded POSReady			
Chassis Housing	Aluminum & plastic			
Dimension	323.6(W) x 264.2(H) x 368(D) mm			

Specifications subject to change without notice.

Features Highlight



Small footprint and compact design



Optional UPS





IP64 dust & spill resistant for front bezel



Optional VFD, MSR, iButton, Fingerprint reader and second display

Mechanical Layout / Drawing

Unit: mm

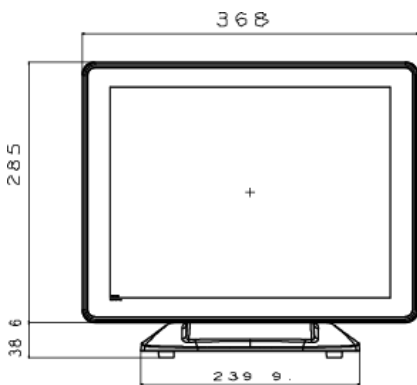

PT6000 Rear I/O Drawing

