

■ TA896AUC-XXX Cat.6A UTP Mini Keystone Jack

■ Specification:

Qualified Cat.6A/Class E^A (10G/500MHz)
 TIA/EIA-568-B.2-10 draft 3
 ISO/IEC 11801 2nd Edition
 EN 50173 2nd Edition
 IEC 60603-7

■ Electrical:

Current Rating: 1.5Amps
 Insulation resistance: 500 Million ohms minimum
 Contact resistance: 20 mili ohms maximum
 DC resistance: 0.1 ohms maximum

■ Mechanical:

Plug insertion life: 750 Cycles minimum
 Plug & Jack contact force: 100 Grams minimum
 Using FCC-Approved Plug
 Plug retention force: 30 lbs minimum
 Temperature: -40°F to 150°F (-40°C to 68°C)

■ Physicals:

Housing: PC, UL 94V-0


PCB Module:

- Insertion: PBT UL94V-0
- Contact: Ø0.46mm phosphor bronze gold over nickel plating
- IDC: PC, 94V-0
- PCB: FR4 1.0mm thickness
- Cap: PC, UL94V-0

Cable holder: PC, UL94V-0



TA896AUC-2XX (with cable holder)

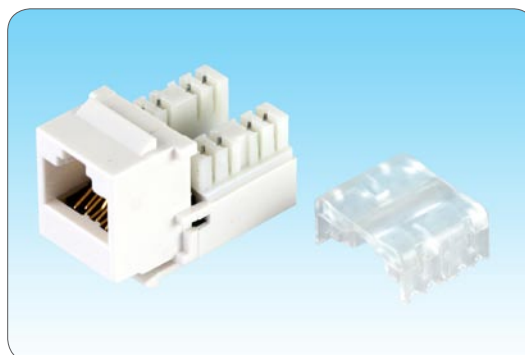

TA896AUC-1XX (without cable holder)

