

BPC

SE-8122

Slim and Fanless Embedded PC

Features and Benefits:

- Intel® N2800/D2550 processor
- Fanless and compact size PC
- Maximum support 2 x LAN, 6 x USB2.0 and 4 x Serial port, 4 in/ 4 out Digital IO , 1 x SIM card slot
- Support wide temperature 0°C ~ 55°C (for Wide temperature CFast card)
- Support 9~36V wide range DC -in



Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu
District Taipei 114, Taiwan
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199
E-mail: sales@protech.com.tw
<http://www.protech.com.tw>

Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870
TEL: +1-714- 996-7200 FAX: +1-714- 996-7300
Sales: sales@protech-usa.net
<http://www.protech-usa.net>

Protech Japan Co., Ltd.

OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku,
Tokyo, 140-0013
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282
E-mail: sam@protech-j.com
<http://www.protech-j.com>




ISO CERTIFIED
9001 14001


SE-8122

Slim and Fanless Embedded PC


Front View

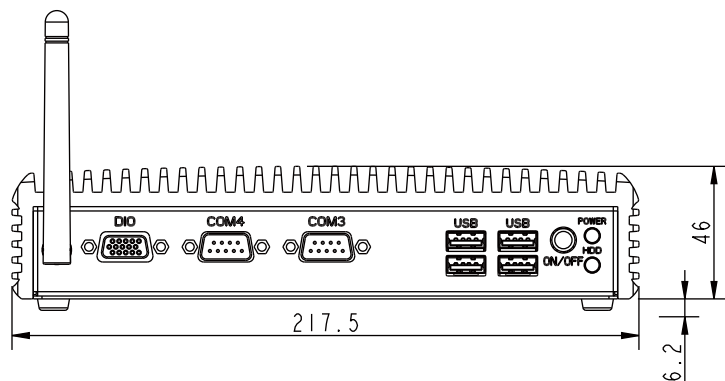

Side View

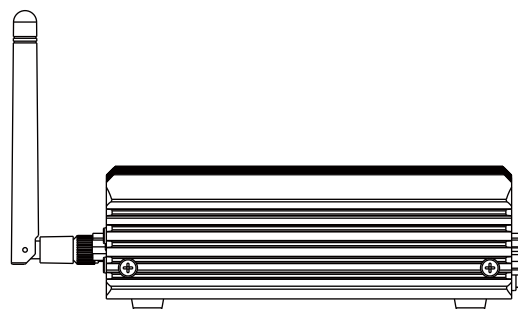

Rear View

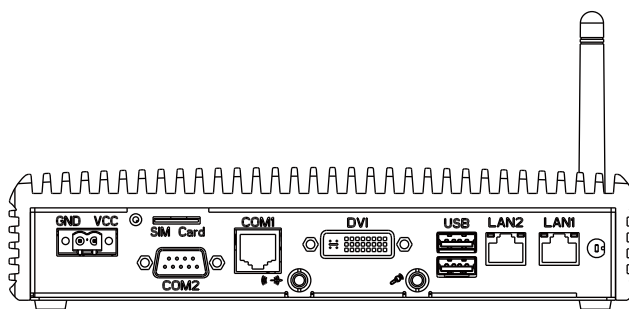

Unit: mm

Specification

System	
CPU Support	Intel® N2800/D2550 CPU on board
Chipset	Intel® NM10
Memory Support	1 x DDR3 SO-Dimm socket up to 4GB memory
Watchdog	1~255secs Watchdog timer selectable w / Reset / NMI
Driver Bay	1 x 2.5 inch SATA HDD or SSD driver space support
Power requirement	9~36V DC-in
Power Adaptor	24V,72W power adaptor (optional)
O.S. Support	Windows7
Expansion Slot	1 x CFast slot , 1 x mini-PCIe slot, 1 x SIM card slot
System Weight	2Kg
Dimension (W x H x D)	217.5 x 45 x 148 mm (8.56" x 1.77" x 5.83")
Certificate	FCC / CE

I/O Ports (Front side)

Serial Port	2 ports support (COM 3/4 for RS232)
Digital I/O	4in / 4out
USB	4 x USB2.0

I/O Ports (Rear side)

Serial Port	2 ports support (COM1 for RS232, COM2 for RS232/422/485, COM1/2 RI/5V/12V selectable)
--------------------	---

DVI	1 x DVI-I
LAN	2 x 10/100/1000 LAN
Audio	1 x Line out, 1 x Mic in
USB	2 x USB2.0
SIM card	1 x SIM card slot

Environment

Operation Temp.	HDD:0°C ~45°C (32°F~113°F) Wide temperature CFast card:0°C ~ 55°C (32°F~131°F)(w/o Audio)
Storage Temp.	- 20°C ~ 70°C (- 4°F~158°F)
Humidity	20% ~ 90%

Ordering Information

SE-8122RA-A0B	Intel® N2800 CPU + 1 x DVI-I + 4 x COM + 2 x LAN + 6 x USB2.0 + 1 x D I/O(4in/4out) + 1 x SIM card slot
SE-8122RA-B0B	Intel® D2550 CPU + 1 x DVI-I + 4 x COM + 2 x LAN + 6 x USB2.0 + 1 x D I/O(4in/4out) + 1 x SIM card slot

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Dec. 2012.