


SBC

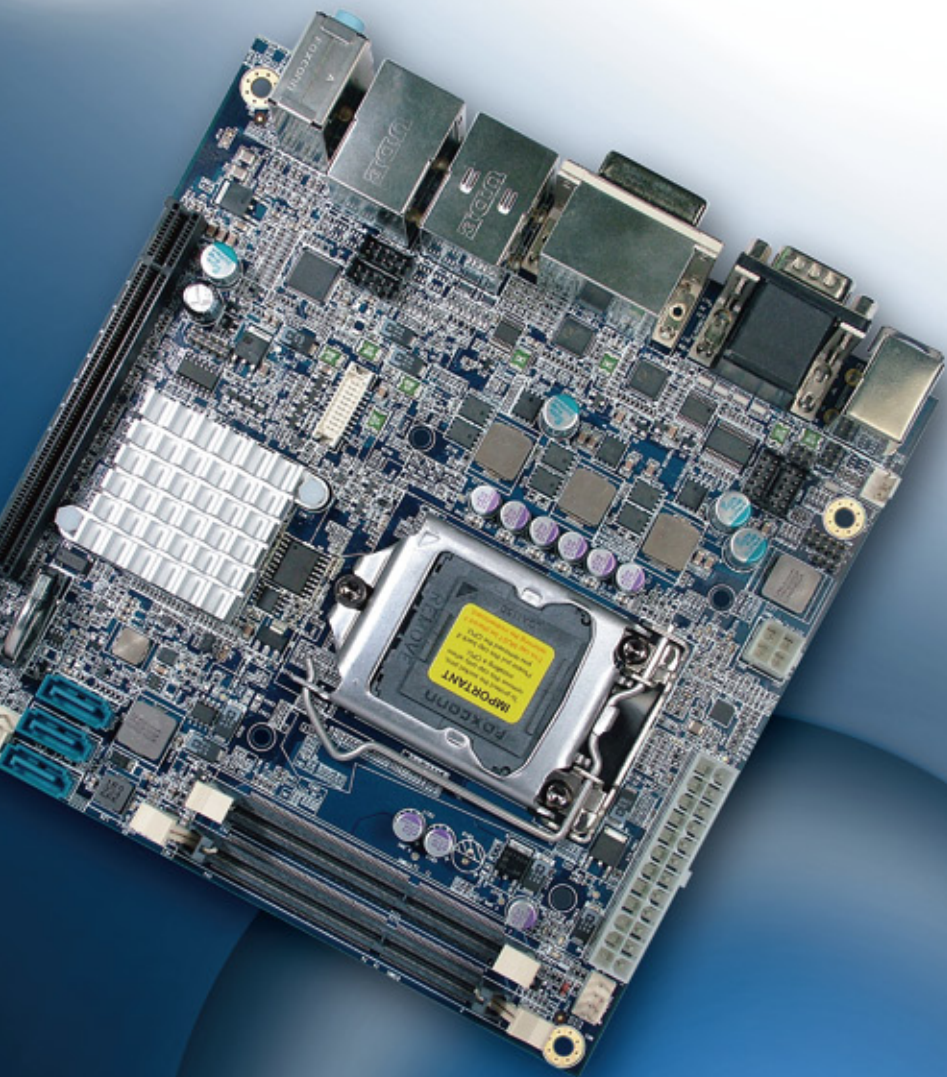

BM-0942

Mini ITX MB supports Intel® 4th Gen. Core™ i7/i5/i3/ Pentium® Processor with 2DVI/ DP/ 2LAN/ 4COM/ Audio

Features :

- LGA1150 Intel® 4th Gen. Core™ i7/i5/i3 and Pentium® Processor
- Equipped with Intel® H81/Q87 Chipset
- Memory support two DDR3 SO-DIMM sockets 1333/1600 up to 16 GB
- Support two DVI and Display Port
- Support Dual Gigabit LAN
- Support SATA RAID 0, 1, 5
- Expansion Slots for one PCIe(16x)
- Support USB 3.0



PROTECH SYSTEMS

It's the right choice

Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199
E-mail: sales@protech.com.tw
<http://www.protech.com.tw>

Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870
TEL: +1-714- 996-7200 FAX: +1-714- 996-7300
Sales: sales@protech-usa.net
<http://www.protech-usa.net>

Protech Japan Co., Ltd.

OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282
E-mail: sam@protech-j.com
<http://www.protech-j.com>





ISO CERTIFIED

9001 | 14001

BM-0942

Mini ITX MB supports Intel® 4th Gen. Core™ i7/i5/i3/ Pentium® Processor with 2DVI/ DP/ 2LAN/ 4COM/ Audio

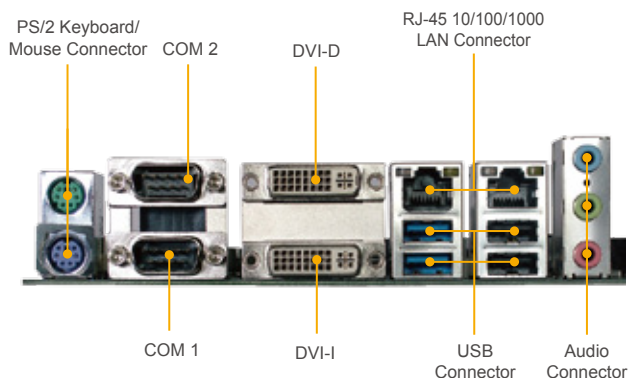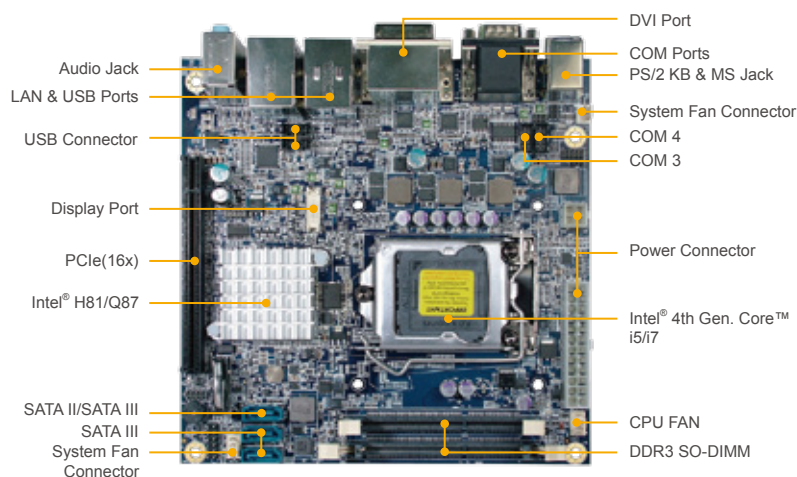

Specifications

System

CPU Support	Intel® 4th Gen. Core™ i7/i5/i3 and Pentium® processor
CPU Frequency	3.3~3.9GHz
Chipset	Intel® PCH H81/Q87
DRAM	2 x 204-pin DDR3 SO-DIMM, support dual-channel DDR3 1333/1600 GHz (system max. 16GB)
BIOS	AMI BIOS
Watchdog	1~255 secs Watchdog timer selectable
Power Supply	Support ATX Power
Power Consumption	+5V:1.3A; +12V:2.35A; +3.3V:0.6A; +5VSB:0.14A (CPU: i7 4770S 3.1GHz)
Dimension	170mm x 170mm (6.69" x 6.69")
Certificate	CE/ FCC
OS Support	Windows 8, Windows 7

I/O Chipset

SATA Interface	2 x SATA III (6.0Gb/s), 1 x SATA II (3.0Gb/s), (Raid 0,1,5)
Expansion BUS	1 x PCIe(16x)
Serial Port	4 x COM port, COM 1/3/4 for RS-232, COM 2 for RS-232/422/485 COM1/2 support 5V/12V
Keyboard/Mouse	PS/2 Connector, with mini DIN connector

LAN

LAN 1: Intel® i217LM/V (10/100/1000 Mbps)
LAN 2: Intel® i210-AT (10/100/1000 Mbps)
Support Wake-on-LAN with ATX power

Audio

High Definition Audio; Realtek ALC888S with MIC / Line-In / Line-Out

USB

6 x USB 2.0 + 2 x USB 3.0

Display

Built-in processor, share system memory

Graphics

Support 1 x DVI-I
1 x DVI-D
1 x Display port

*Discrete graphic card is necessary for display if the chosen CPU doesn't have integrated graphics support.

Environment

Operation Temp. 0° ~ 60° C (32° ~ 140° F)

Storage Temp. - 40° ~ 85° C (- 40° ~ 185° F)

Humidity Operation humidity 5 ~ 90% (non-condensing)

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.

Ordering Information

BM-0942RA-00P	Mini ITX MB with Intel® i7/i5/i3 Processor(LGA1150)+H81, DDR3/2DVI/2LAN/4COM
BM-0942RA-01P	Mini ITX MB with Intel® i7/i5/i3 Processor(LGA1150)+Q87, DDR3/2DVI/2LAN/4COM

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Feb. 2014.