


Atrust

Atrust Mobile Thin Client mt100

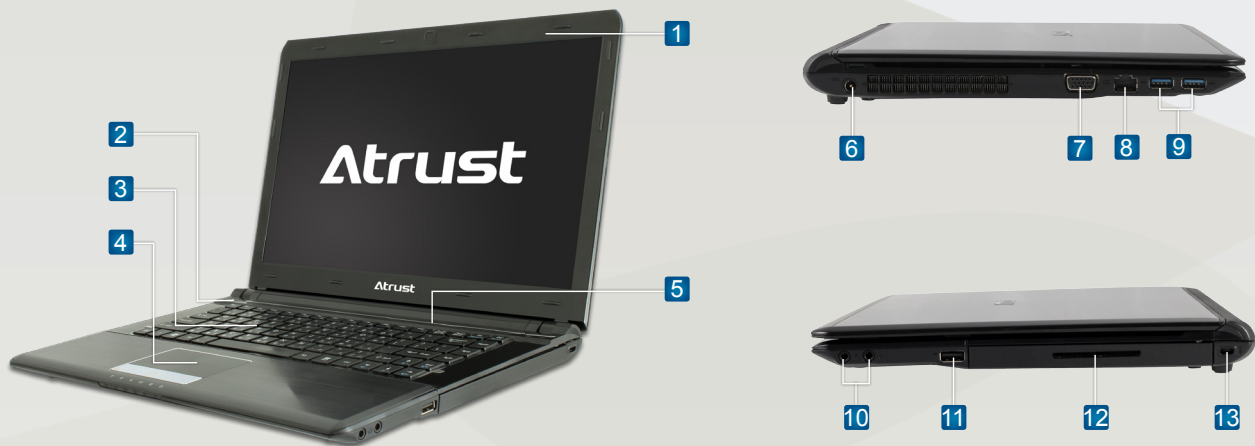

1 Internal Microphone

Built-in microphone for audio input.

2 Power Button / Power LED

Press to turn on the client / Indicates the status of power.

3 Keyboard

Built-in keyboard for control and input.

4 Touch Pad

Built-in pointing device for control and input.

5 Speakers

Built-in speaker for audio output.

6 DC IN

Connects to an AC adaptor.

7 VGA Port

Connects to an external display.

8 LAN Port

Connects to a host server through a LAN switch.

9 USB Port

Connects to a USB device.

10 Microphone / Headphone Port

Connects to a microphone / a set of headphones or a speaker system.

11 USB Port

Connects to a USB device.

12 Smartcard Reader (Optional)

Insert a smart card for identification, authentication.

13 Kensington Lock Slot

Connects a Kensington cable to secure the mobile thin client.

Atrust mt100 Features

Low total cost of ownership

Additional computing access is as simple as adding more thin client devices. The total cost of ownership is then drastically reduced.

Simple click and play

mt100 connects to the host server with a Remote Desktop connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

Rich remote user experience

With Citrix HDX/ICA, Microsoft RDP and VMware View, mt100 can provide a rich and efficient computing experience.

Easy management and maintenance

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.



Atrust mt100 Mobile Thin Client

System	
Processor	TI ARM 1.0 GHz
Memory	
System memory	2GB
Flash memory	4GB
Display	
LCD Type/Resolution	14" 16:9 Glare / 1366 x 768 pixel, LED Backlight
I/O Interfaces	
I/O ports	1 x RJ-45, 1 x Headphone port, 1 x Microphone port, 2 x Stereo speaker, 1 x DC IN, 1 x VGA, 1 x Built-in microphone, 1 x Smart card slot (optional)
Networking	
Ethernet	10/100/1000Mb
Wireless	IEEE 802.11b/g/n
Keyboard	Keyboard 87 keys
Touch Pad	Glide, 2 buttons
Dimensions / Weight	
Dimensions	(W) 339 x (D) 239.4 x (H) 25.4 mm
Weight	1.68kg
Environment	
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
AC Adaptor	19V, 65W, 3.42A
Battery capacity	5900 mAh, 65Wh (Battery Pack)
Protocols	
Protocols	Citrix ICA/HDX, Microsoft RDP with RemoteFX, VMware View

© 2013 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. To learn more, visit www.Atrustcorp.com.