



1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

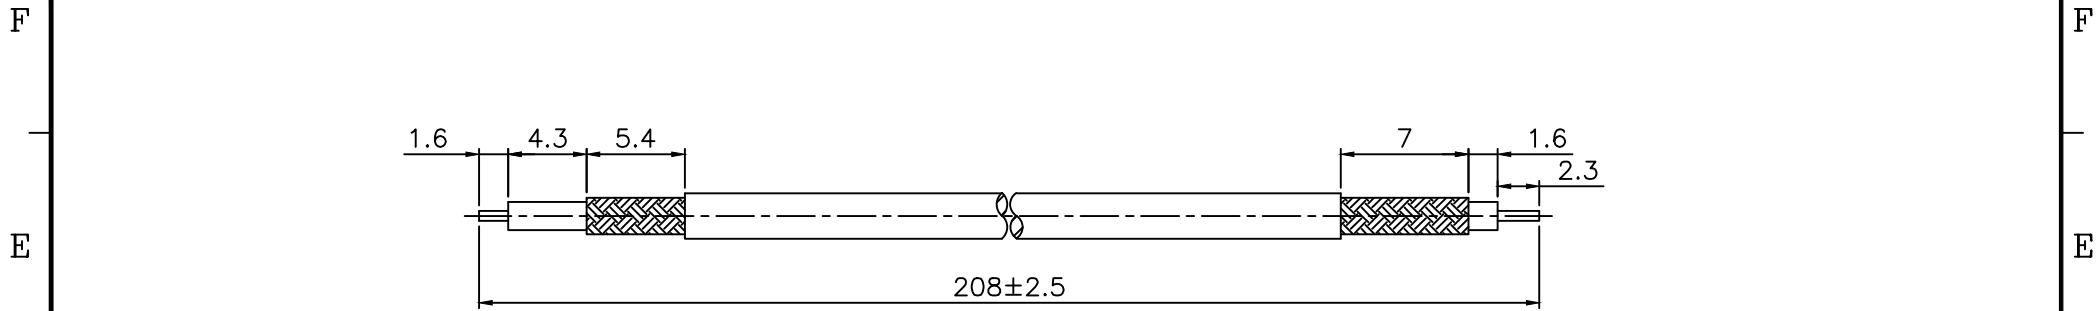

RECOMMENDED  
CABLE STRIPPING DIM'S

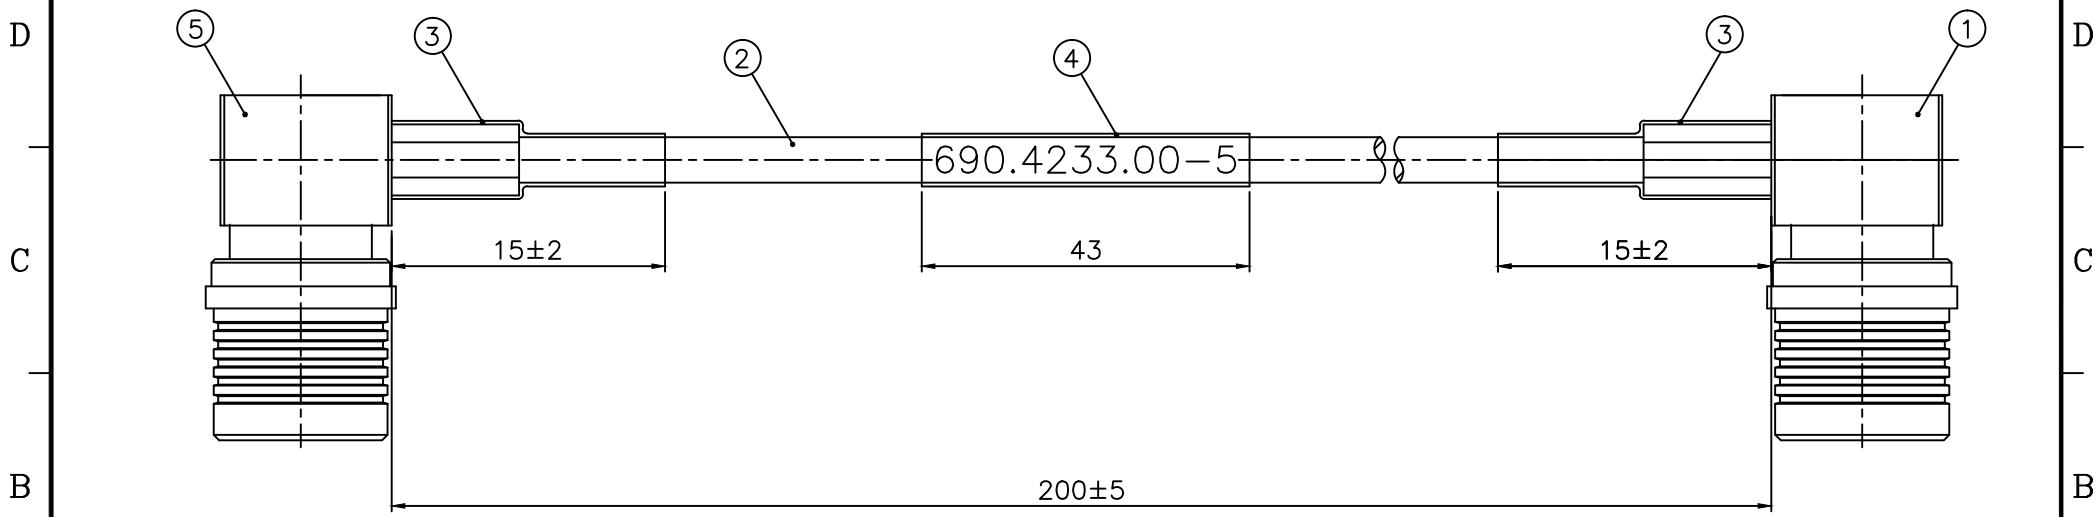

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
4	HEAT SHRINK TUBING (ø4.5)		WHITE	1	HT00AAH001F L=43mm
3	HEAT SHRINK TUBING (ø4)		BLACK	2	HT00AAC001F L=15mm
2	RG-316/U		APRICOT	1	CAB000000021F
1	CONNECTOR	BRASS	NICKEL	1	691112AA36025F

**Se** Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE		
ABOVE 315 mm ± 1.60	Angle ± 3°		QMA Right Angle plug to QMA Right Angle plug with RG-316/U Cable		
120-315 mm ± 1.00					
40-120 mm ± 0.60					
06-40 mm ± 0.20					
UP To 06 mm ± 0.12					
DRAWN	Annie	DATE	2011/12/07	PART NO.	SC-S-69M69M001F
SCALE	2.5:1	SIZE	A4	SHEET	1/1
				REV	A0

1 2 3 4 5 6 7 8

A

A

F

F

E

E

D

D

C

C

B

B