



RP-IPE800

8-P Fast Ethernet Industrial PoE+ Switch

RP-IPE800 is an industrial 8 port 10/100M high power PoE switch providing 48-56VDC input sources. RP-IPE800 complies with IEEE 802.3af/at standards supplying PoE power budget 30W per port.

RP-IPE800 is well suited for applications in deploying IP surveillance, traffic monitoring and for a broad range of applications. It can be used as a stand-alone device for buses, trucks, and other vehicles for Surveillance purposes. It is being rigorously tested for your Security, Transportation and Telco application in climatically demanding environments with wide temperature range from -40 to 75°C.

With IP30 industrial case protection, the RP-IPE800 provides a high level of immunity against corrosion and electromagnetic interference. RP-IPE800 also allows either DIN rail or wall mounting for efficient use of cabinet space.


Feature

- Supports P.S.E. based on IEEE 802.3at up to 30 Watts per port
- RJ-45 port support Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Support 48VDC power inputs for power redundancy
- Back-plane (Switching Fabric): 1.6Gbps
- 1M Memory Buffer
- 1K MAC Address Table
- Power Polarity Reverse Protect
- Overload Current Re-settable Fuse Present
- IP-30 Protection
- DIN Rail and Wall Mount Design
- Support Wide Operating Temperature -40°C~75°C

Specification

Standards	<ul style="list-style-type: none"> • IEEE 802.3 10Base-T Ethernet • IEEE 802.3u 100Base-TX Fast Ethernet • IEEE802.3x Flow Control and Back Pressure, • IEEE802.3af for PoE; IEEE802.3at for PoE+
Switch Architecture	<ul style="list-style-type: none"> • Back-plane (Switching Fabric): 1.6Gbps
Data Processing	<ul style="list-style-type: none"> • Store and Forward
Flow Control	<ul style="list-style-type: none"> • IEEE 802.3x Flow Control and Back Pressure
Memory Buffer	<ul style="list-style-type: none"> • 1M
Mac Address	<ul style="list-style-type: none"> • 1K MAC
Interface	<ul style="list-style-type: none"> • 8 x 10/100Mbps TP Jack (RJ-45) auto negotiation, Auto MDI/MDI-X function, Full/Half duplex, 802.3af/at PoE PSE port, 30W per port
Network Cable	<ul style="list-style-type: none"> • UTP/STP above Cat.5e Cable • EIA/TIA-568 10-ohm (100m)
Protocol	<ul style="list-style-type: none"> • CSMA/CD
LED Indicators	<ul style="list-style-type: none"> • Per unit: Power 1 (Green), Power 2 (Green), SW-relay (Amber) • Per port: Link/Active (Green), POE Detected (Amber)
Reserve polarity protection	<ul style="list-style-type: none"> • Present
Overload current protection	<ul style="list-style-type: none"> • Present
Power Consumption	<ul style="list-style-type: none"> • 5.76W@48 VDC full load, Without POE
Power Supply	<ul style="list-style-type: none"> • Redundant Dual DC 48V-56V Power Input • PoE input 48-56VDC
Alarm Relay Contact	<ul style="list-style-type: none"> • Relay outputs with current carrying capacity of 1A @24VDC • Relay in short circuit mode when 2 powers are connected. in open circuit mode when only one power supply is connected
POE power	<ul style="list-style-type: none"> • POE power per port 30watts. Maximum 36Watts • Maximum total power 200Watts with 56VDC input, Supports IEEE802.3af/at
Removable Terminal Block	<ul style="list-style-type: none"> • Provide 2 Redundant power , Alarm relay contact ,6 Pin • Wire range: 0.34mm² to 2.5mm² • Solid wire (AWG):12-24/14-22 • Stranded wire(AWG): 12-24/14-22 • Torque:5lb-In/0.5Nm/0.56Nm • Wire Strip length: 7-8mm
Environment	<ul style="list-style-type: none"> • Operating temperature : -40°C~75°C • Storage temperature: -40°C ~85°C • Operating Humidity: 5% to 95% (Non-Condensing)
Dimension	<ul style="list-style-type: none"> • 142 x 36.2 x 105mm (LxWxD)
Housing	<ul style="list-style-type: none"> • Rugged Metal ,IP30 Protection
Installation	<ul style="list-style-type: none"> • DIN Rail and Wall Mount Design
EMC/EMS	<ul style="list-style-type: none"> • CE, FCC
EMI	<ul style="list-style-type: none"> • FCC Part 15 Subpart B Class A, CE EN 55022 Class A
Safety	<ul style="list-style-type: none"> • IEC EN60950-1

Dimension

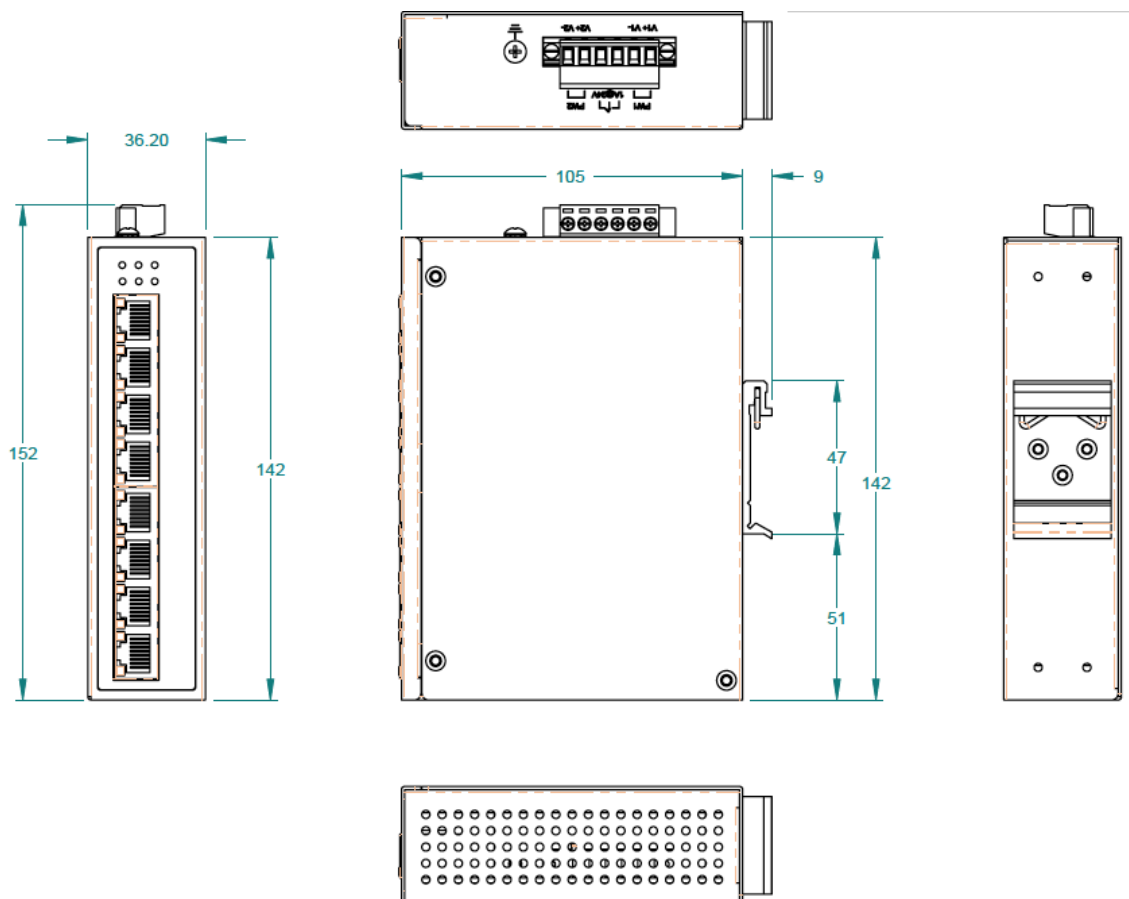

Ordering information

RP-IPE800 8-P Fast Ethernet Industrial PoE+ Switch