


4-Port HDMI Switch

The SW-H00401-0B High-Definition Multimedia Interface (HDMI) Switch is a compact audio/video connector interface for transmitting uncompressed digital streams. This 4 to 1 HDMI Switch swaps HDMI signal between four different sources to one display device with an ease of pressing remote control button. This device is especially designed for advanced home theatres, conference rooms and retail stores, allowing connections from DVD player, advanced game consoles, satellite receivers, digital boxes, Blue-ray player, PCs... and much more.



HDMI Switch Connection

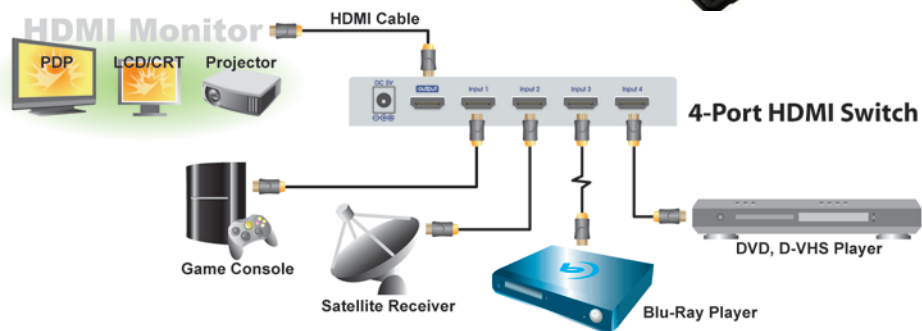

Switching four HDMI Sources to single display

Features

- Conform to HDMI 1.3 specifications
- Fully HDCP 1.1 compliant
- Already pass Confirmation of HDMI ATC Testing certificate
- Compatible to all HDMI equipped devices, HDCP-enabled HDTV devices
- Four HDMI sources using one High Definition Display (eg. HDTV)
- Using push button or remote control to switch display device port between HDMI sources
- The cable length from input device to this switch box plus this switch box to output device is maximum 30 meters
- Ideal for home theatre integration
- Infrared remote control for easy switching
- Supports high resolution input:
PC: VGA, SVGA, XGA, SXGA and UXGA
HDTV: 480i, 576i, 480p, 576p, 1080i and 1080p

SW-H00401-0B Specifications:

- 4x HDMI source input port
- 1x HDMI display device output Port
- HDMI source port connector (Female): HDMI 19-pin Type A
- Display Device Port Connector (Female): HDMI 19-pin Type A
- Display device selection: Push Button, IR Remote Control
- 4x Device Port LED
- 1x Power LED
- Video Bandwidth(bps): 2.25G single link
- EDID emulation: Yes
- Single Link Range: 1920x1080p@60Hz, UXGA
- Vertical Frequency Range: 60Hz
- Maximum Total Cable Length (meters): 30M
- Power Supply: DC 5V, 1A (Optional)
- Operation Temperature: 0~50°C
- Storage Temperature: -20~60°C
- Emission: CE, FCC
- Enclosure: Metal
- Dimension (mm): 149x64x23 mm
- Weight (g): 220g