

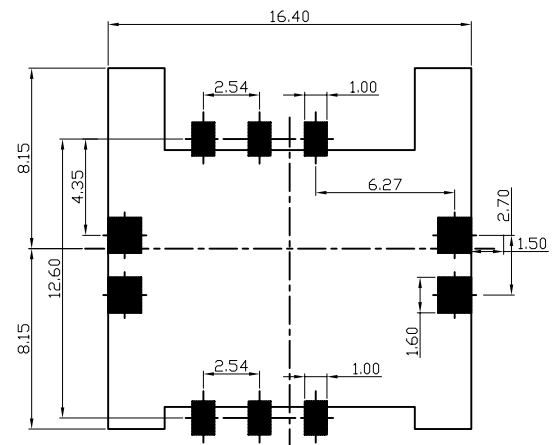
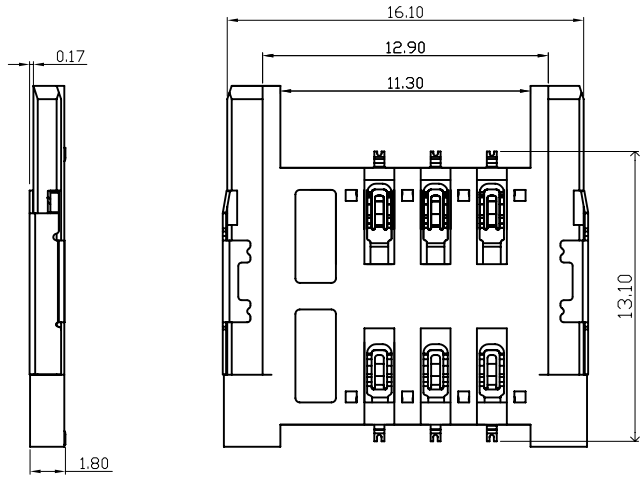


REV.	DATE	ECN.NO	MODIFY.CONTENT	APPROVER
A	2017.06.21		初版发行	Jason

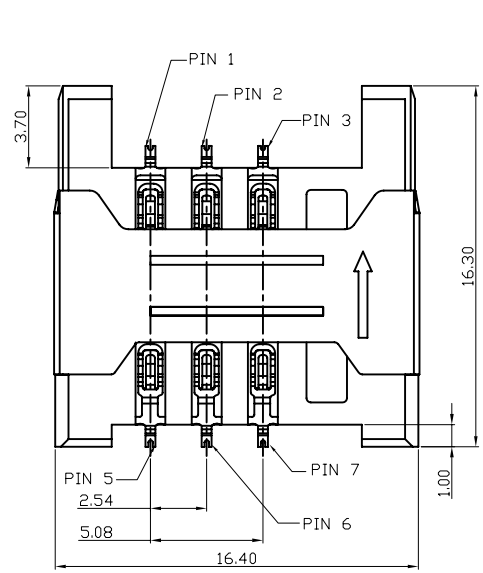

RECOMMENDED PCB PAD LAYOUT
REFERENCE TOLERANCE: ±0.05mm

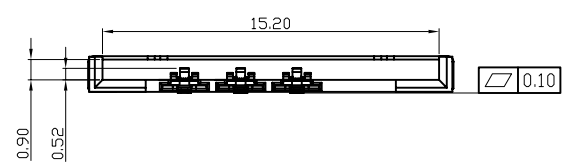

Specifications:

- Material:**
 1.Housing: Thermoplastics ,UL94V-0
 2.Contact: Copper Alloy, Gold plated in contact area; Matte Tin plating in Welding area; Nickel plated overall.
 3.Shell: SUS
 4.Lead free and ROHS compliant product.

Electrical:

- 1.Current Rating: 1.0A
 2.Voltage Rating: 12 V AC
 3.Contact Resistance: 50 mΩ MAX
 4.Dielectric Withstanding Voltage: 250V AC for one minute
 5.Insulation Resistance: 1000 MΩ MIN

Environment characteristics:

- 1.Operating Temperature: -40°C~+85°C

Mechanical:

- 3.Durability : 5000 Cycles

PIN NO.	PIN NAME
PIN 1	Supply Voltage Vcc
PIN 2	Resrt (RST)
PIN 3	Clock (CLK)
PIN 5	Ground
PIN 6	Programming Voltage Vpp
PIN 7	I/O
PIN 4/8	N/A

Seconn International Enterprise Co., Ltd.

TOLERANCES		PROJECTION	TITLE			
x.	= ± ----	 UNIT mm	SIM Card Connector 2.54mm 6 Pin H:1.8mm Type			
x.x	= ± 0.38					
x.xx	= ± 0.25					
x.xxx	= ± 0.10					
DRAWN	PIAO	DATE	2017/06/21	PART NO.	SIM-S06C-12201	
SCALE	1:1	SIZE	A4	SHEET	1/1	REV A0